
PAA 250 / 2.0 STEEL LIFTING DAVIT CRANE dlhonline.co.uk - 0161 223 1990



PAA 250 / 2.0 STEEL LIFTING DAVIT CRANE

dlhonline.co.uk - 0161 223 1990

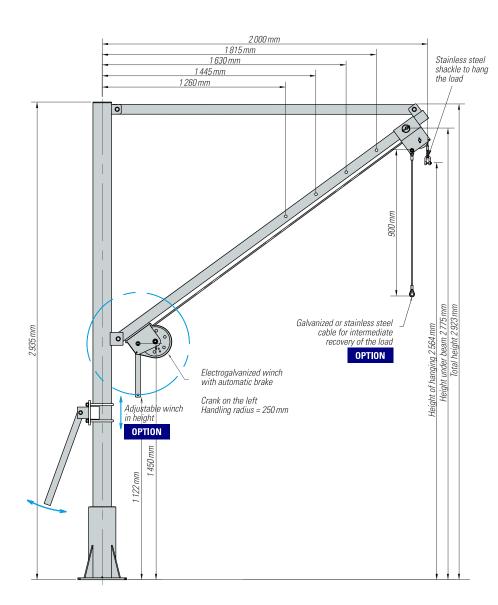



Measure in mm

Span	1 260	1 445	1 630	1815	2000
HA	2 020	2156	2 292	2 428	2 5 6 4
HSF	2 2 3 2	2 368	2 502	2640	2775

Weight in Kg

Pillar	25
Deflection	34
Winch	10
Operating arm	7
Chemical socket	18
Wall socket	22





Description

- · Galvanised finish / Socket galvanised and painted.
- SWL = 250 DaN.
- Adjustable span from 1260 mm to 2000 mm.
- Height of hooking at the shackle = 2564 mm.
- Standard version with manual winch electro-galvanised
- Galvanised cable length 12 m:
- automatic load brake,
- length per turn of the handle = 39 mm,
- storage capacity = 23m / Ø cable = 4 mm,
- crank force = 72 N.

- Stainless steel pulley mounted on bearing.
- Stainless steel shackle for long load attachment. 12 mm.
- Maximum moment = 737 DaN.m
- Reaction per anchor = 1340 DaN.

Options

- Rotation arm.
- Bolts, winch and operating arms Stainless steel.
- Winch rope in stainless steel.
- Galvanised or stainless steel intermediate sling.

Davit only version without winch with suspension for:

- manual hoist
- electric hoist
- Air balancer

Tool balancer

PAA 250 / 2.0 STEEL LIFTING DAVIT CRANE


dlhonline.co.uk - 0161 223 1990

NEED A QUOTE?

If you would like a quote, please fill out this request form.~ Complete, save and email to sales@dale-lifting.co.uk

Name	
Company	
Address	
Telephone No.	
Email address	
Notes	
Delivery address if different	


Select PAA 250 / 2.0 Options	
Davit only	
Davit with Galvanised winch, 12 m rope and pulley	
Davit with stainless steel winch, 12 m rope and pulley	



DALE

Lifting and Handling Specialists 2 Kelbrook Road Manchester M11 2QA Telephone 0161 223 1990 Email sales@dale-lifting.co.uk Website www.dlhonline.co.uk





Optional Extras	Finish	Height of lift / length	Quantity Required
Intermediate cable sling	Galvanised	0.9 m	
intermediate cable sing	Stainless steel	0.9 m	
Pump lifting chain	Galvanised		
with ring every metre	Stainless steel		
Extra Doo abaakla (Saraw Bin)	Galvanised		
Extra Dee shackle (Screw Pin)	Stainless steel		
	Standard		
WH Hand chain block	Corrosion resistant		
Yale 360 chain block with rotating	Standard		
guard, allows offset operation	Corrosion resistant		
Yale CPS electric chain hoist 110V	Standard		
Yale CPS electric chain hoist 240V	Standard		
Air balancer	Standard		
Tool balancer	Standard		

Additional information / requirements