

dlhonline.co.uk 0161 223 1990



Interclamp[®]
the right connection

**PRE-ASSEMBLED POSTS AND CUT RAILS TO YOUR
REQUIREMENTS ON REQUEST - CONTACT US FOR DETAILS**



Interclamp[®]
Assist



The Interclamp Assist range has been especially designed to help compliance with the public access requirements of the Equality Act 2010 (formerly DDA), BS 8300:2018 and Building Regulations Part M 20 15/ 16. In order to give our customers more choice, a range of both internally expanding clamps and saddle type fittings is available, neither of which requires the use of welding, threading or specialist tools.

Our classic range of internally expanding fittings requires no riveting or drilling of tube, whereas the saddle-type fittings require less tube cutting and hence easier handrail alignment. No other special fittings are required, which enables full integration with both new Interclamp systems and the refurbishment or upgrading of existing tubular structures to help meet the newer access specifications.

In order to meet the requirements of the above standards, the range forms flush joints with size C42 tube. Tube available in RAL 1012 alert yellow thermoplastic coating to help meet "not cold to the touch" requirement.

Steps and disabled access slopes may easily be accommodated, facilitating compliance with public access standards.

For C42 size internally expanding Assist fittings (as with type 150), tubes must be 42.4mm od x 3.2mm wall thickness e.g. 1 1/4" medium weight to BS EN 10255 (formerly BS1387). All cut tube ends must be deburred and treated with Interclamp Silver Galvanising Spray or other suitable protection. Optional O-rings may be fitted to each end of the expanding Assist fittings to achieve the best finish.


Certain fittings are also available to suit D48 handrails.

www.dhonline.co.uk
Div. of Dale Lifting and Handling
0161 223 1990



PRE-ASSEMBLED POSTS AND CUT RAILS TO YOUR REQUIREMENTS ON REQUEST - CONTACT US FOR DETAILS

WITH DDA COMPLIANT HANDRAILS



SMOOTH, CONTINUOUS, IN-LINE DISABILITY HANDRAIL RANGE.



COMPATIBLE FOR USE IN CONJUNCTION WITH THE STANDARD INTERCLAMP RANGE



EASY ACCOMMODATION OF SLOPES AND ACCESS RAMPS



HELPS MEET DDA COMPLIANCE



THERMOPLASTIC COATED TUBE AVAILABLE IN ALERT YELLOW RAL 1012 WARM TO TOUCH



NO WELDING REQUIRED




QUICK AND EASY TO INSTALL WITH MINIMAL TOOLS



SAVE TIME AND MONEY VS PRE-FABRICATION



EX-STOCK AND EASY TO TRANSPORT

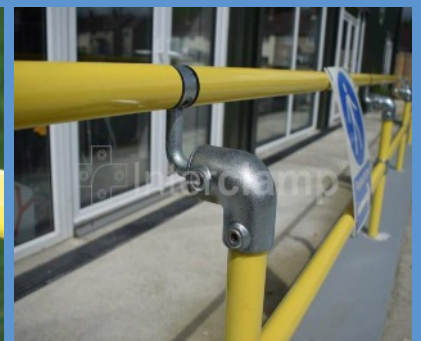


DDA COMPLIANT HANDRAILS

www.dhonline.co.uk
Div. of Dale Lifting and Handling
0161 223 1990



720 C42		721 C42		724 C42		725 C42	
728 C42		729 C42		731 C42		745 C42 D48	
747 C42 D48		748 C42		750 C42 C42/ D48 D48		751 C42 C42/ D48	
797 C42 D48		798* PH2		390 400ml		150 c42 D48	
		799* PH2					<p>* Illustration shows multiple fittings.</p> <p>** Requires 2 x 150 - C42 (not shown) or other expanding fittings. Requires assembly.</p>

A SAMPLE OF TYPICAL CONFIGURATIONS

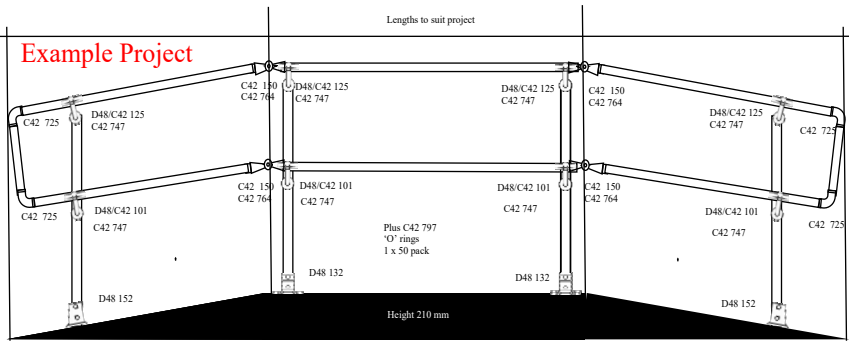

Pre-assembled by DLHONLINE for installation by client



729 C42 + 125 C42		747 C42 + 101 C42 + 133 C42	
747 C42 + 125 C42		747 C42 + 104 C42	
724 C42 + 748 C42 + 125 C42		721 C42 + 125 D48/ C42 + 101 D48/ C42 + 748 C42	
725 C42 + 731 C42		<p>Some configurations are shown with optional O-rings and some require multiple fittings.</p>	